

# SR23MR

Powerful, tough, durable and designed with value in mind

- ▶ Engine model: Yuchai YC6M220Z-T20
- ▶ Rated power: 162 kW/2200 rpm
- ▶ Operating weight: 23.0 t

## Product features

Designed for value durability and power specifically as a bulk waste management and landfill compactor, the 23.0-ton SR23MR features four-wheel drive, torque converter, power shift transmission, stepless speed regulation and articulated frame. For operator productivity and safety, its dual cab comes standard with air conditioning, heating, air purification devices and even a CD stereo. Powered by a Yuchai YC6M220Z-T20 engine.



Address: Unit 1 Jurgens Street Jet Park Ext 5- 1619

Tel: +27 (0) 11 390 8160

Website: <http://en.shantui.com>

**SHANTUI**  
VALUE THAT WORKS

Fuelled By

**EVERSTAR**  
Industries

# SR23MR

## Technical specifications:

Overall length: 7360 mm

Minimum turning radius: 6786 mm

Overall width: 3200 mm



Fuel capacity: 400 L

Overall height: 3640 mm

SR23MR

WEIGHT AND DIMENSIONS		Weights		Operating weight		23000 kg		
	WEIGHT AND DIMENSIONS	Weights	Axle load, front	11500 kg				
			Axle load, rear	11500 kg				
			Compaction characteristic		Static linear load, front/rear	626 N/cm		
				Working width	3090 mm			
				Drum diameter	1620 mm			
			Wheelbase	3350 mm				
BLADE		Maximum lifting height		1050 mm				
		Maximum cutting depth		160 mm				
		Blade capacity		8.7 m <sup>3</sup>				
ENGINE AND DRIVE TRAIN		Engine		Make & model		Yuchai YC6M220Z-T20		
				Type		Turbocharged		
				Fuel		Diesel		
				Cooling		Water		
				Number of cylinders		6		
				Rated power		162 kW		
				Rated speed		2200 rpm		
		Drive Train		Minimum ground clearance		455 mm		
				Maximum climbing ability		100%		
				Forward speed		I	0~4.37 km/h	
						II	0~6.82 km/h	
						III	0~10 km/h	
				Reverse speed		I	0~4.37 km/h	
						II	0~6.82 km/h	
						III	-	
CABIN & CONTROLS		Brakes		Service brake		Pressurized air braking		
				Parking brake		Mechanical		
		Steering		Steering system		Oscillating, articulating		
				Steering method		Hydrostatic		
				Steering angle (Grad)		±36°		
				Oscillating angle (Grad)		±7°		

## OVERALL DIMENSIONS

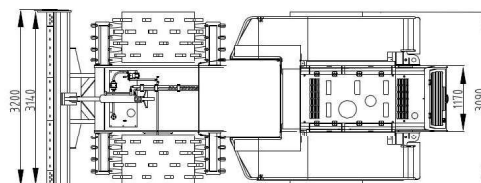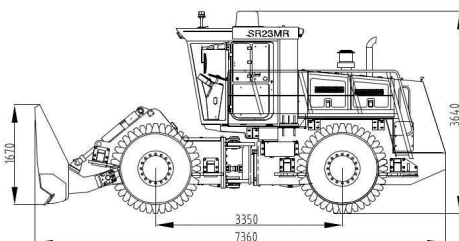

▶ THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.