

SR26MR-3

Powerful, tough, durable and designed with value in mind

- ▶ Engine model: Shangchai C6121ZG16G
- ▶ Rated power: 187 kW/2200 rpm
- ▶ Operating weight: 26.0 t

Product features

Designed for value, durability and power specifically as a bulk waste management and landfill compactor, the 26.0-ton SR26MR-3 features four-wheel drive, torque converter, power shift transmission, stepless speed regulation and articulated frame. For operator productivity and safety, its dual cab comes standard with air conditioning, heating, air purification devices and even a CD stereo. Powered by a Shangchai C6121ZG16G engine.



Address: Unit 1 Jurgens Street Jet Park Ext 5- 1619

Tel: +27 (0) 11 390 8160

Website: <http://en.shantui.com>

SHANTUI
VALUE THAT WORKS

Fuelled By

EVERSTAR
Industries

SR26MR-3

Technical specifications:

Overall length: 7940 mm





Minimum turning radius: 7250 mm

Overall width: 3660 mm



Fuel capacity: 450L

Overall height: 3925 mm

SR26MR

WEIGHT AND DIMENSIONS		Weights		Operating weight		26000 kg						
	WEIGHT AND DIMENSIONS	Weights	Axle load, front	13000 kg		Compaction characteristic	Static linear load, front/rear	650 N/cm				
			Axle load, rear	13000 kg			Working width	3360 mm				
			Drum diameter	1636 mm			Wheelbase	3500 mm				
			BLADE	Maximum lifting height	1150 mm		Maximum cutting depth	165 mm		Blade capacity	11 m ³	
					ENGINE AND DRIVE TRAIN	Engine	Make & model	Shangchai C6121ZG16G		Drive Train	Minimum ground clearance	435 mm
Type	Turbocharged						Maximum climbing ability	100 %				
Fuel	Diesel		Forward speed				I	0~4.82 km/h				
Cooling	Water						II	0~7.66 km/h				
Number of cylinders	6						III	0~11.6 km/h				
Rated power	187 kW		Reverse speed				I	0~4.82 km/h				
Rated speed	2200 rpm			II	0~7.66 km/h							
				III	-							
	CABIN & CONTROLS	Brakes	Service brake	Pressurized air braking		Steering	Steering system	Oscillating, articulating				
			Parking brake	Mechanical			Steering method	Hydrostatic				
		Steering	Steering angle (Grad)	±36°			Oscillating angle (Grad)	±8°				

OVERALL DIMENSIONS

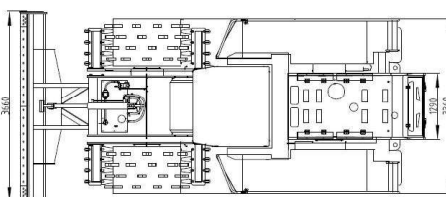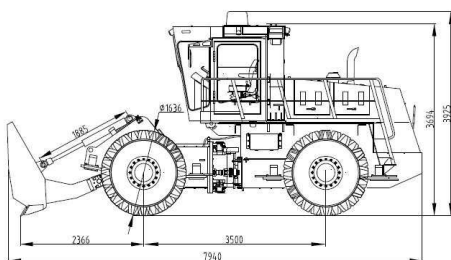

▶ THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.